




Dräger X-am Pump

Pump for Multi-Gas Detectors

The Dräger X-am Pump is an external pump for the portable gas detectors Dräger X-am 2500/2800 and X-am 5000/5600/5800 – designed for clearance measurement, for example in tanks and shafts. The pump automatically switches on when it is connected to a running X-am device. The change from pump mode to diffusion mode is fast and easy.

Dräger X-am Pump

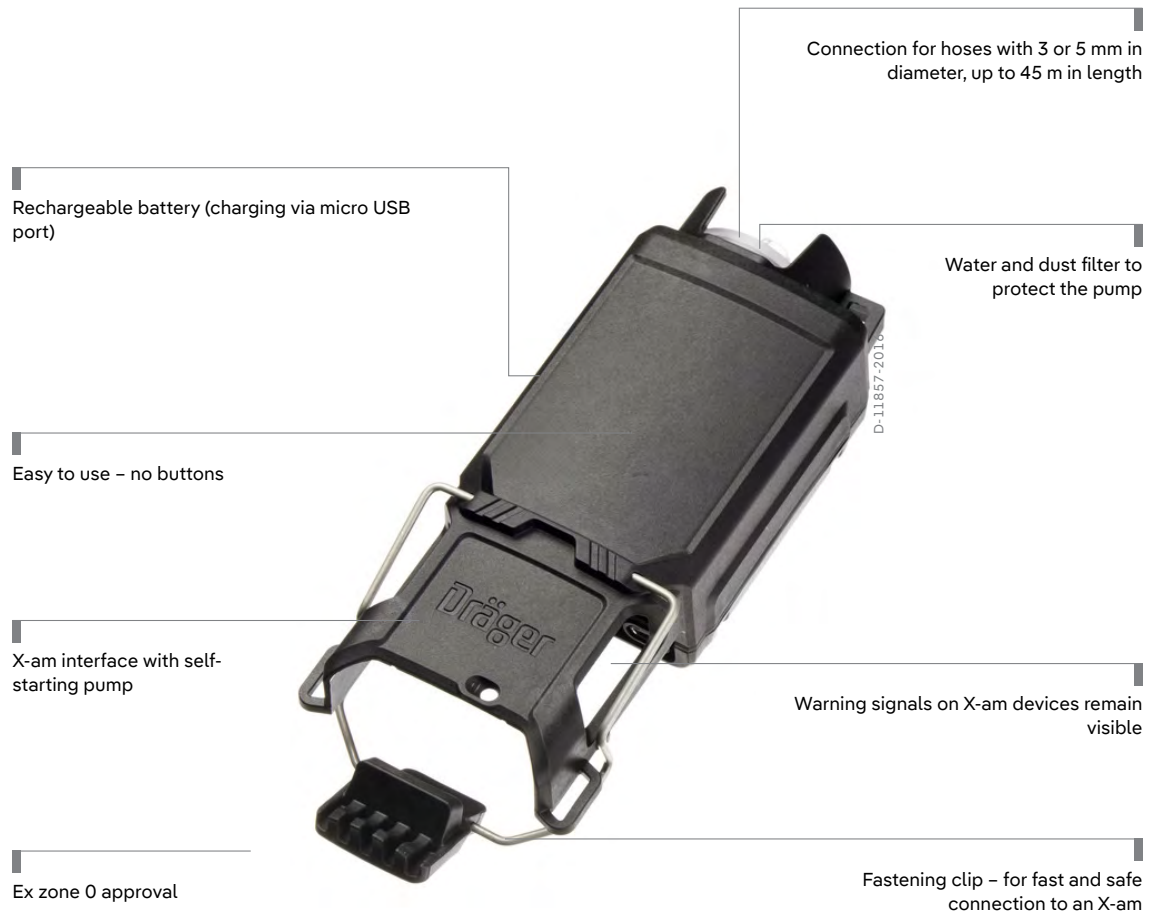

Benefits

Easy to use

The pump is attached onto the X-am 2500/2800 and X-am 5000/5600/5800 and fastened with a clip. Pumping starts automatically once pump and running gas detection device are connected. The pump turns off automatically once it is removed from the device. Using the X-am with the pump has no effect on the measuring performance for standard gases.

Charging via USB

The pump battery can be recharged using the micro USB port. A standard cellphone charger can be used for connecting. The charge status is indicated by an LED on the pump. A full charge requires approximately six hours.

Handy and robust

The pump's easily manageable 17.5 cm device height and a weight of only 200 g permit easy carrying and stowage. The Dräger X-am pump is dust and water resistant according to the IP67 protection classification. It performs reliably even at temperatures down to -40 °C. The battery is solid cast to protect against damage due to dropping or impact.

Effective range of measuring results: with explosion protection

The pump can reach the ambient atmosphere in inaccessible places – up to a distance of 45 m, e.g. in channels, shafts, or tank systems. The pump has been optimised for hoses with a diameter of 3 mm – for fast response times and low power consumption.

The use of the pump in combination with a X-am device ensures you of consistently precise measuring results – even in the most demanding situations. Because the pump has an explosion protection approval for Ex zone 0. In combination with the Dräger X-am 2500/2800 and X-am 5000/5600/5800, which are likewise approved for Ex zone 0, the X-am pump allows for secure and continuous monitoring of enclosed areas.

Long operating time for long deployments

The pump is not only highly resilient on the outside but also inside. The battery capacity lasts for three workweeks at 8 measurements per day (i.e. up to 20 hours of continuous operation). Convenient: The operating time of the X-am is not decreased when the pump is in operation. Moreover, the entire pump operating time can be evaluated using CC-vision software.

Data logger

Pump operating time, charge status, battery warnings, and flow alarm are displayed on the Dräger X-am and stored in the data logger. This makes it possible to display the results of the clearance measurements separate from the evaluations of personal monitoring.

System Components

D-2754-2018



Dräger X-am 2500

The Dräger X-am 2500 was especially developed for use as personal protection. The 1 to 4 gas detector reliably detects combustible gases and vapours, as well as O₂, CO, H₂S, NO₂ and SO₂. Reliable and fully mature measuring technology, durable sensors and easy handling ensure a high degree of safety with extremely low operating costs.

D-3411-2022



Dräger X-am 2800

The X-am 2800 multi-gas detector measures up to four gases and is equipped with a particularly shock-resistant CatEx sensor. With the Dräger Gas Detection Connect software, it offers live data transmission and powerful fleet management. Designed for personal monitoring, the X-am 2800 offers the highest level of safety at a low cost of ownership.

D-14325-2017



Dräger X-am 5000

The Dräger X-am 5000 belongs to a generation of gas detectors, developed especially for personal monitoring applications. This 1- to 5-gas detector reliably measures combustible gases and vapors as well as oxygen and harmful concentrations of toxic gases, organic vapors, Odorant and Amine.

D-23637-2009



Dräger X-am 5600

Featuring an ergonomic design and innovative infrared sensor technology, the Dräger X-am 5600 is one of the smallest gas detection instrument for the measurement of up to 6 gases. Ideal for personal monitoring applications, this robust and water-tight detector provides accurate, reliable measurements of flammable and toxic gases and vapors as well as oxygen.

System Components

D-9538-2022



Dräger X-am 5800

The X-am 5800 multi-gas detector measures up to six gases and is equipped with a particularly shock-resistant CatEx sensor. With the Dräger Gas Detection Connect software, it offers live data transmission and powerful asset management. Designed for personal monitoring, the X-am 5800 offers you the highest level of safety at a low cost of ownership.

D-4701-2017



X-am CSE-Kit

It consists of an X-am pump with USB charger, telescopic and float probe, 5 m FKM hose, 3 m transparent PVC Tygon® hose, gasing adapter, charging cradle for the X-am, pressure reducer for test gas and DIRA adapter for a read out of the data logger.

Accessories

D-4741-2017



Float Probe

For clearance measurement, for example in tanks, manholes, vaults, pits, silos, pipes, tunnels, or tank systems.

D-4747-2017



Telescopic probe ES 150

For leak detection. A probe made of stainless steel extendable to 1.5 m with FKM grade hose.

D-4743-2017



USB power supply

D-4706-2017



Case for Dräger X-am Pump

The carrying case for the Dräger X-am contains the shoulder strap and has room for storing the power cord, charging unit, and hose.

Accessories

D-4717-2017



Shoulder strap for X-am Pump

Provides a secure attachment for the X-am monitors.

D-4704-2017



CSE Set X-am Pump

The CSE Set X-am Pump contains pump, float probe, 5 m FKM hose and shoulder strap.

D-4735-2017



16 ft (5 m) hose (diameter 0,12 in/3 mm)

The solvent-resistant FKM hose speeds flushing time and saves weight.

D-4728-2017



Leather carrying case for X-am pump

The leather case is designed to protect the X-am device and pump. It is equipped with a belt loop on the reverse and can be used to support the pump when it is separated from the X-am.

Services

D-2331-2016



Product service

Our product service department supports you with a range of service packages – in our shops or on site at your facility. Care, servicing and maintenance are key factors when it comes to safety. Diligent maintenance and care is also absolutely necessary from an economics perspective. Preventive checks, service procedures and original replacement parts make your investment last longer.

D-2335-2016



Training

The Dräger Academy has been sharing its solid, practical knowledge for over 40 years. We hold more than 2,400 training courses each year on a range of over 600 topics, with more than 110 authorised trainers. We equip your staff with practical knowledge and ensure that what they learn can be applied effectively, both day-to-day and, more importantly, whenever critical situations occur. We are happy to develop a customised training programme for you.

D-2330-2016



Rental Service

From bridging a temporary shortage of equipment to procuring special equipment for applications involving specific requirements: If you only need to cover a temporary higher demand, then Dräger Rental Service with over 65,000 pieces of rental equipment is an economical alternative to purchasing. Fast, straightforward and with a wide range of additional services available upon request.

Technical Data

Dräger X-am Pump

Dimensions	67 x 175 x 38 mm (without X-am) 67 x 220 x 55 mm (with X-am)
Weight	approx. 200 g
Operating temperature	-20 °C to 50 °C (briefly -40 °C)
Temperature when charging	0 – 35 °C
Charging time	< 6 hours
Operating time	Up to 20 hours, depending on type of application and temperature
Maximum hose length	45 m
Air flow volume	0.4 L/min
Storage temperature	Up to 1 month -20 °C to 60 °C, otherwise -20 °C to 45 °C
Pressure	700 to 1,300 hPa
Air humidity	0 to 95 % RH
IP protection class	IP67
Approvals	c_CSA_us ATEX/IECEX (Zone 0 T4 and M1) DNV-GL CE label

Ordering Information

	Order No.
Dräger X-am Pump	8327100
Dräger X-am Pump incl. USB charger and shoulder strap	8327115
USB power supply	8327102
USB 2.0 Cable	8327108
Shoulder strap	8319386
Leather case	8327103
Case for Dräger X-am Pump	8327104
CSE Set Dräger X-am Pump	8327105
Dräger X-am 2500 CSE-Kit	8327106
USB 10x Multi-Charger	8327113
Filter with hose connector (3 mm and 5 mm)	8319364
E part clip	5600956
Telescopic probe ES 150	8316533
Float probe	8327654
5 m FKM hose (diameter 3 mm)	8325705

Not all products, features, or services are for sale in all countries. Trademarks mentioned herein are the property of its respective owner. Trademarks may be owned by Drägerwerk AG & Co. KGaA (Dräger) or its affiliates in certain countries and not necessarily in the country in which this material is released. Visit www.draeger.com/trademarks for the current status of Dräger's trademarks.

Corporate Headquarters

Drägerwerk AG & Co. KGaA
Moislinger Allee 53–55
23558 Lübeck, Germany
■ www.draeger.com

Region Europe

Dräger Safety AG & Co. KGaA

Revalstraße 1
23560 Lübeck, Germany
☎ +49 451 882 0
☎ +49 451 882 2080
✉ info@draeger.com

Region Asia Pacific

Dräger Singapore Pte. Ltd.

61 Science Park Road
The Galen #04-01
Singapore 117525
☎ +65 6872 9288
☎ +65 6259 0398

Region Middle East, Africa

Dräger Safety AG & Co. KGaA

Branch Office
P.O. Box 505108
Dubai, United Arab Emirates
☎ +971 4 4294 600
☎ +971 4 4294 699
✉ contactuae@draeger.com

Region Central and South America

Dräger Indústria e Comércio Ltda.

Al. Pucurui - 51 - Tamboré
06460-100 - Barueri - São Paulo
☎ +55 (11) 4689-4900
✉ relacionamento@draeger.com



Locate your Regional Sales Representative at:
www.draeger.com/contact